


**Earth Continuity Connector**

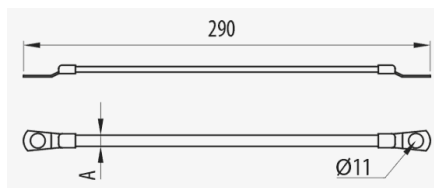

**Description**

Copper braided connector to provide electrical continuity in terminated sections of trays.

**Advantages**

Suitable for bonding all ranges of trays.

Available in two sizes: 12 mm<sup>2</sup> and 16 mm<sup>2</sup>.

Electrical continuity guaranteed according to standard IEC61537.

**Applications**

Suitable for connection between continuous lengths of Rejiband® wire mesh trays, ensuring electrical continuity.

**Solutions**



**Earth Continuity Connector**

**Main technical characteristics**

LTN	10	Brass	-50 / 150 °C	ETIM EC002935
-----	----	-------	--------------	------------------

**Product data**

꺾껌	REF	kg/u
12	68000036	0.014
16	68000037	0.020

**Protection System**

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass


**Insulating materials**

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic




**Earth Continuity Connector**

**Product applications**

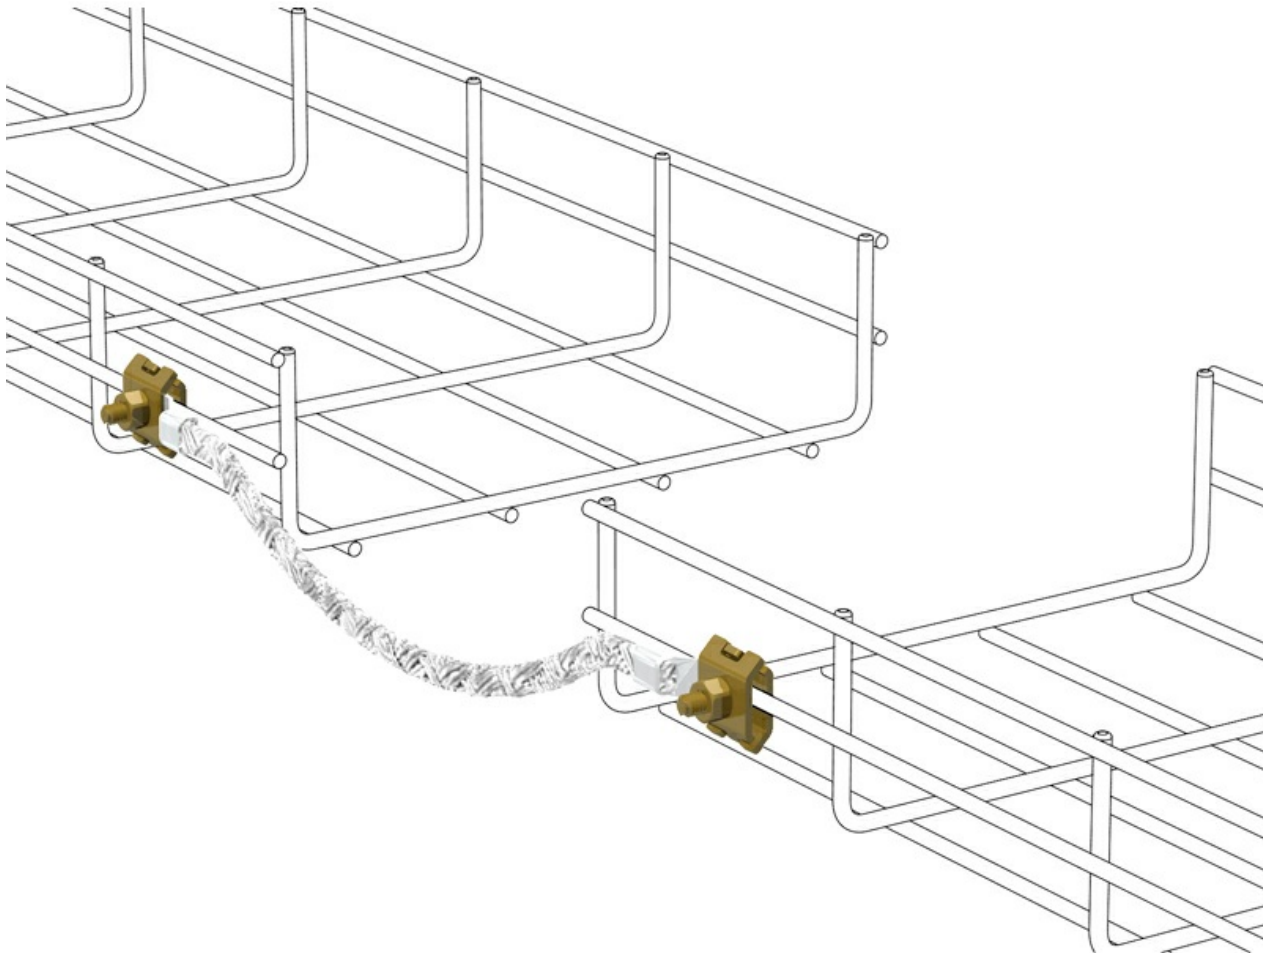

**Earth Continuity Connector**

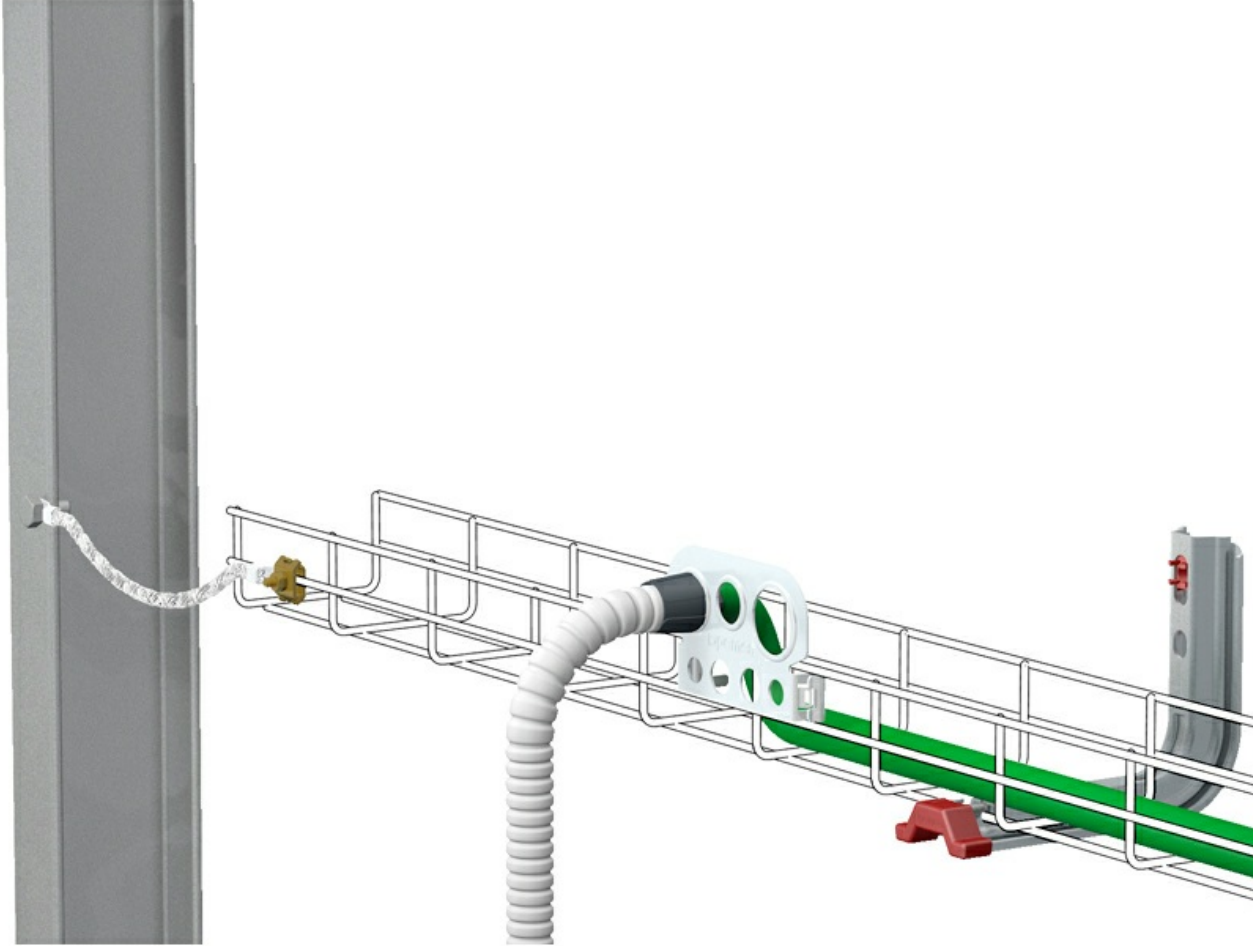

**Earth Continuity Connector**

