
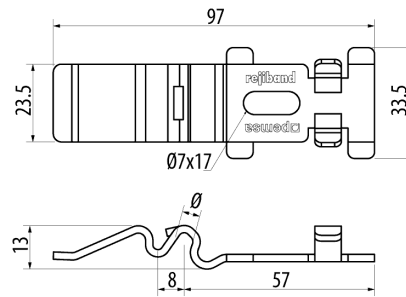


Click Coupler

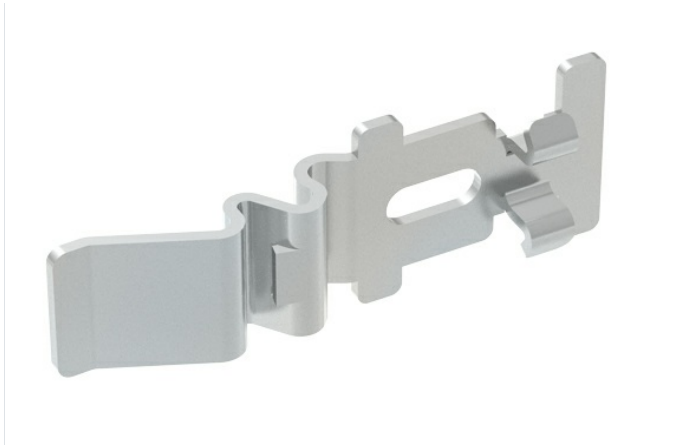

Description

Component for the side connection of Rejiband trays by means of the Click system of fast connection without screws. It is suitable for all widths and 60 mm height, with surface protection. It is assembled without the need for any special tools and allows the side joining between sections of Rejiband trays in less time, ensuring the mechanical strength of the joint and electrical continuity, according to IEC61537. Made of steel with EZ or BC Protection System.

Advantages

Quick installation on the sides of the tray.

Optimisation of assembly time.

These connectors are supplied separately for use in the Rejiband tray to create a quick click attachment system.

Electrical continuity guaranteed according to standard IEC61537.

Available in two protection systems, EZ and BC, depending on the type of application.

Applications

Suitable for the fast connection of Rejiband trays in electrical and/or telecommunications installations in: Civil works, Tunnels, Car Parks, Public Buildings, Shopping Centres, Large Infrastructures, Airports, Metro Lines, Railway. Tertiary Sector and industrial applications: Naval, Petrochemical, Textile, Chemical, Food.

Solutions



Main technical characteristics

 20	 Steel with surface coating	 -50 / 150 °C	 A1 No combustible	ETIM EC002413
--	--	--	---	------------------

Product data

Ⓢ	Class EC 61537	mm ²	Ref	kg/u
EZ	Class 3	4	64010038	0.049
EZ	Class 3	5	64010040	0.049
BK8	Class 8	4	64080038	0.050
BK8	Class 8	5	64080040	0.050

Ⓢ Protection System

- CU - Copper electroplated
- PG - Pregalvanised
- EZ - Electrogalvanised
- BC - Electrogalvanised Bichromate
- BK8 - High Resistance Coating
- GC - Hot Dip Galvanising
- INOX - Stainless Steel
- PT - Polyester Paint
- AL - Aluminum
- LN - Brass or Nickel-plated brass

Ⓜ Insulating materials

- PC+ABS - Halogen Free Polycarbonate + ABS
- PVC - Polyvinyl Chloride
- PP - Halogen Free Polypropylene
- PA6 - Halogen Free Polyamide 6
- PA12 - Halogen Free Polyamide 12
- PU - Polyurethane
- PE - Polyethylene
- NBR - NBR rubber
- PET - Thermoplastic Polyester
- TPV - Thermoplastic



www.pemsa-rejiband.com

Any information included in this document is property of Pemsa®. It cannot be copied, total or partially, nor disclosed to third parties nor used without the explicit and written authorization by Pemsa®. These documents total or partially, can be subject to patent and/or be patent pending and therefore protected by intellectual and industrial property rights. Pemsa, Rejiband, Pemsaband, Inducanal, Rejitech, Megaband, Pemsaflex are registered trademarks property of "Pemsa Cable Management, S.A."



Product applications

