

Product Datasheet

SR-30

Cable Protection Tube

The Eurostrut SR-30 is a robust cable protection tube designed to guide and shield cables in demanding industrial environments. With an outer diameter of 30 mm, an inner diameter of 27 mm, and a wall thickness of 1.5 mm, this tube offers optimal protection against mechanical impact and corrosion.

Technical specifications

Length:	6 meters
Outer diameter:	30 mm
Inner diameter:	27 mm
Wall thickness:	1.5 mm
Weight:	7.2 kg
Material Standard Number:	1.0039
Chemical Standard:	EN 10219-1
Dimensional Standard:	EN 10219-2
Visual Standard:	EN 10219-1
Mechanical Standard:	EN 10219-1
Certificate:	2.2

Available variants

Hot-dip galvanized steel (SR-30-FT)

For standard industrial applications

Material:	Cold-rolled structural steel S235JRG
Finish:	Hot-dip galvanized according to NEN-EN-ISO 1461 (min. 45 µm)
Coating thickness:	50–60 µm

Stainless steel 304 (SR-30-ER2)

For enhanced corrosion resistance



Material:	Stainless steel 304 (ER2)
Finish:	None

Stainless steel 316L (SR-30-ER4)

For highly corrosive environments

Material:	Stainless steel 316L (1.4404)
Finish:	None

Article number	L mm	D mm	E mm	kg/unit
SR-30-FT	6000	30	1.5	7.2
SR-30-ER2	6000	30	1.5	7.2
SR-30-ER4	6000	30	1.5	7.2

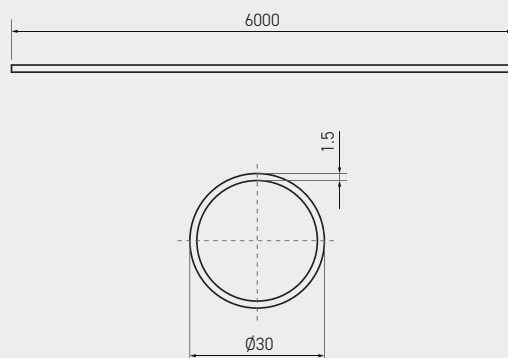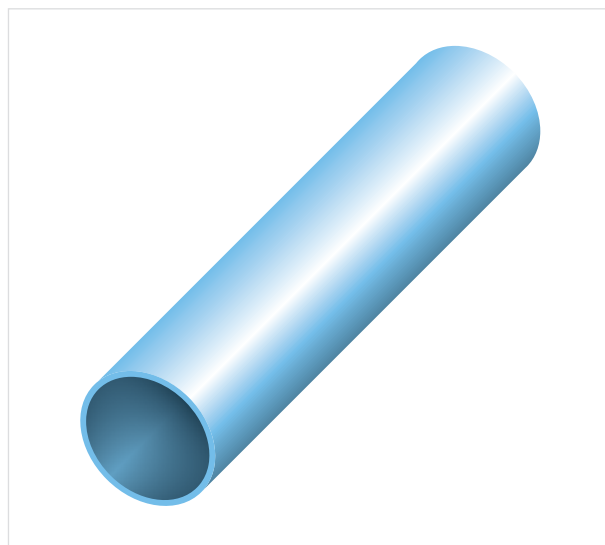

Toepassing

