

# Product Datasheet

## SRL-30

### Cable Protection Tube 30mm

The Eurostrut SRL-30 is a robust cable protection conduit, specifically designed for safely routing and protecting cables in demanding industrial environments. The tube features an outer diameter of 30 mm, an inner diameter of 27 mm, and a wall thickness of 1.5 mm. Laser-cut slots measuring 55 x 20 mm allow for easy cable entry and exit.

#### Technical specifications

<b>Length:</b>	6 metres
<b>Outer diameter:</b>	30 mm
<b>Inner diameter:</b>	27 mm
<b>Wall thickness:</b>	1.5 mm
<b>Laser-cut slots:</b>	55 x 20 mm
<b>Weight:</b>	7.0 kg

#### Available variants

##### Hot-dip galvanized steel (FT)

For standard industrial applications

<b>Material:</b>	Cold-rolled structural steel S235JRG
<b>Finish:</b>	Hot-dip galvanized according to NEN-EN-ISO 1461 (min. 45 µm)
<b>Coating thickness:</b>	50–60 µm

##### Stainless steel 304 (ER2)



For enhanced corrosion resistance

<b>Material:</b>	Stainless steel 304 (ER2)
<b>Finish:</b>	Pickled and passivated


##### Stainless steel 316L (ER4)

For highly corrosive environments

<b>Material:</b>	Stainless steel 316L (1.4404)
<b>Finish:</b>	Pickled and passivated

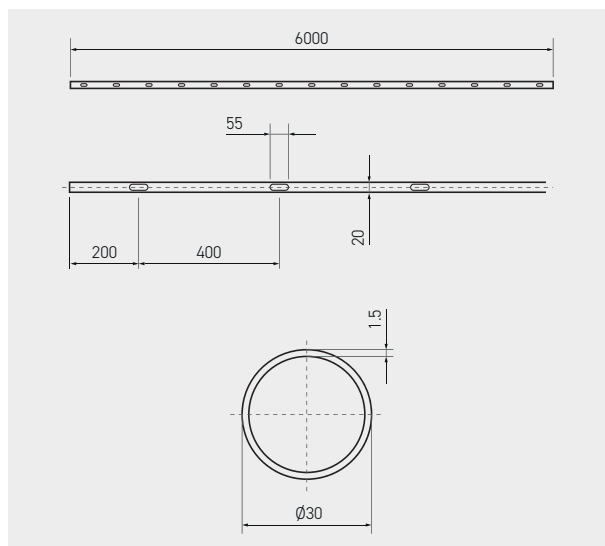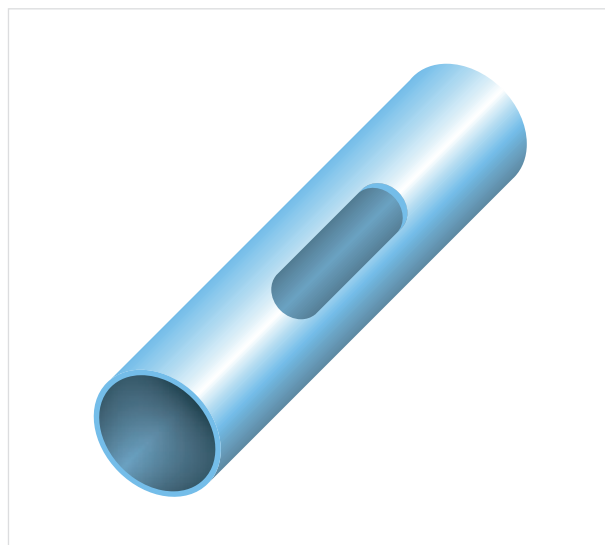

Toepassing

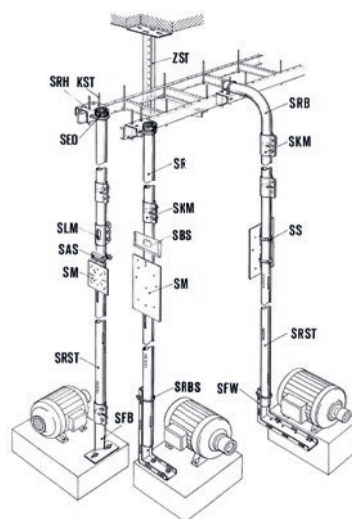

Article number	L mm	D mm	E mm	kg/unit
SRL-30-FT	6000	30	1.5	7.0
SRL-30-ER2	6000	30	1.5	7.0
SRL-30-ER4	6000	30	1.5	7.0