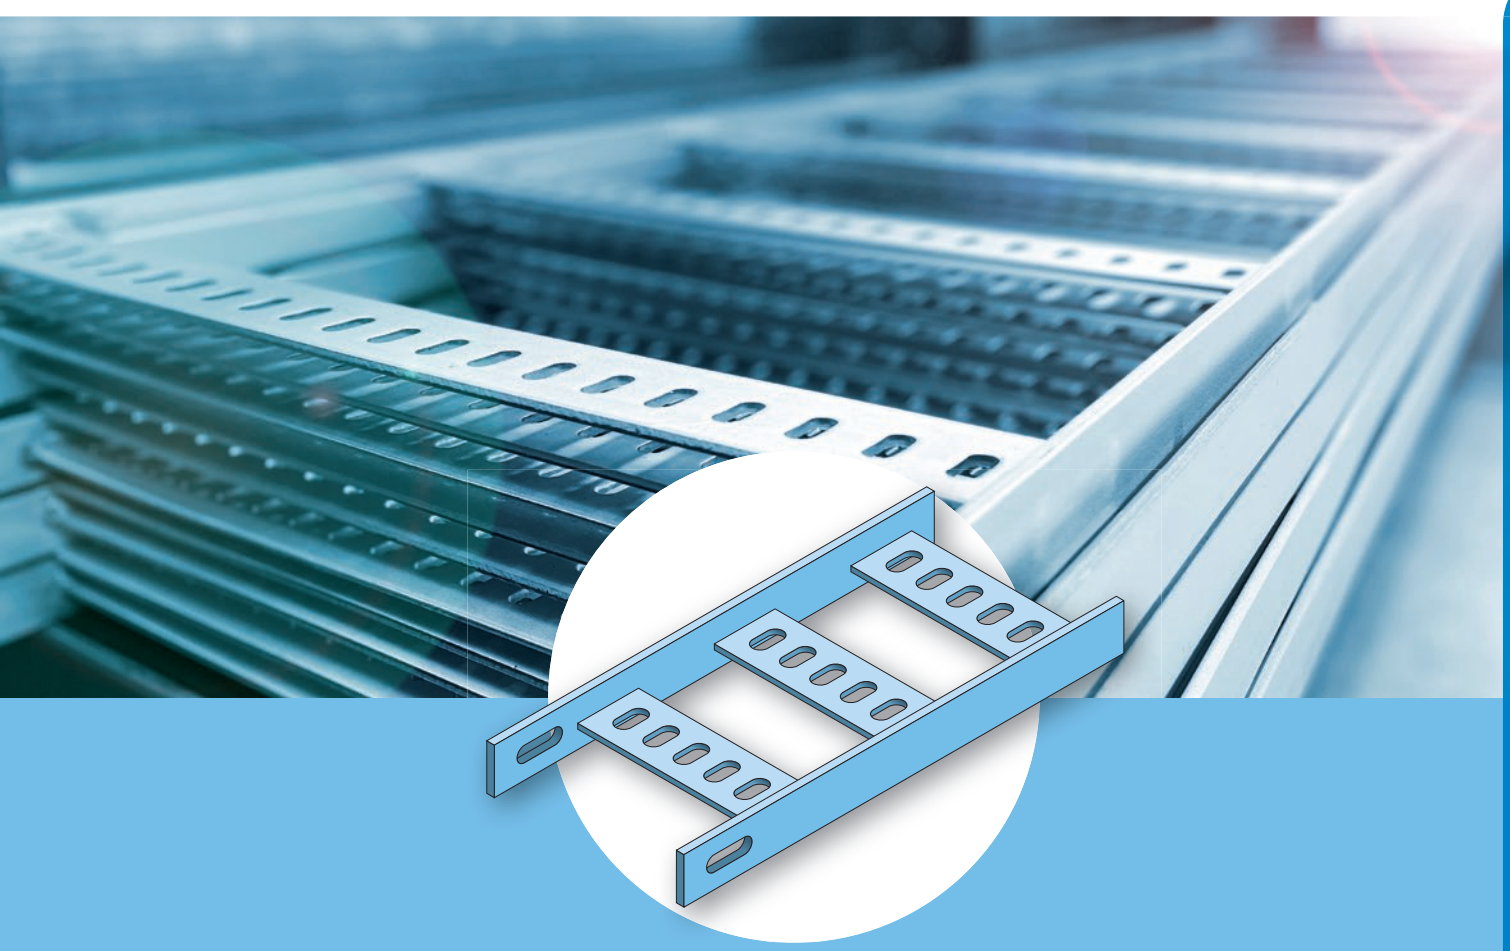


Eurostrut Catalog
Eurostrut | Marine Ladder

Eurostrut®
Cable Management Systems & Solutions

| + 31 10 522 33 51 | info@eurostrut.com | **eurostrut.com**

That's why Eurostrut

Eurostrut produces and sells cable support and strut mounting systems for use in demanding environments. We supply installation companies and other technically oriented companies. Our products are used in markets such as offshore, chemicals, petrochemicals, heavy industry, energy and combined heat and power plants. With more than 20 years of knowledge and experience, we are happy to advise you on the most suitable solution for your project.



Customized solutions: more than **20 YEARS** experience

With more than 20 years of knowledge and experience, Eurostrut is a household name in the market. Did you run into problems and do you need tailor-made advice? No problem. We offer a custom solution for every challenge.



Small-scale and **INVOLVED**

As an independent organization we have a small team of committed employees who are always ready to assist you. We take our pride in quick responses through the phone or email. You can easily place your orders by phone, email or via our website.



Fast delivery with **OWN TRANSPORT SERVICE**

Did you need something urgently? That's not a problem. With our own transport service we deliver your orders quickly and efficiently to any location. We can offer same day delivery, just give us a call to discuss the possibilities.



High quality **OWN BRAND**

All our products meet the highest requirements and are subjected to an extensive inspection upon arrival at our warehouse in Schiedam (NL). Where necessary, products are adjusted and finished to meet our requirements. Products from our own product line are also hot-dip galvanized to a very high degree. Depending on product type, 80 to 160 m.



Competitive **PRICING**


At Eurostrut we supply and produce the best quality cable support systems and solutions at the most competitive prices. With our own brand you get high quality at low cost. We also supply other brands at sharp prices. Request a quotation today!



Your total supplier with **A LARGE STOCK**

We are a total supplier of cable support systems and solutions. We offer a very complete range, from complete installations to loose mounting materials. With a large stock in our warehouse in Schiedam (NL), we can meet every need.

+ 31 10 522 33 51 info@eurostrut.com **eurostrut.com**

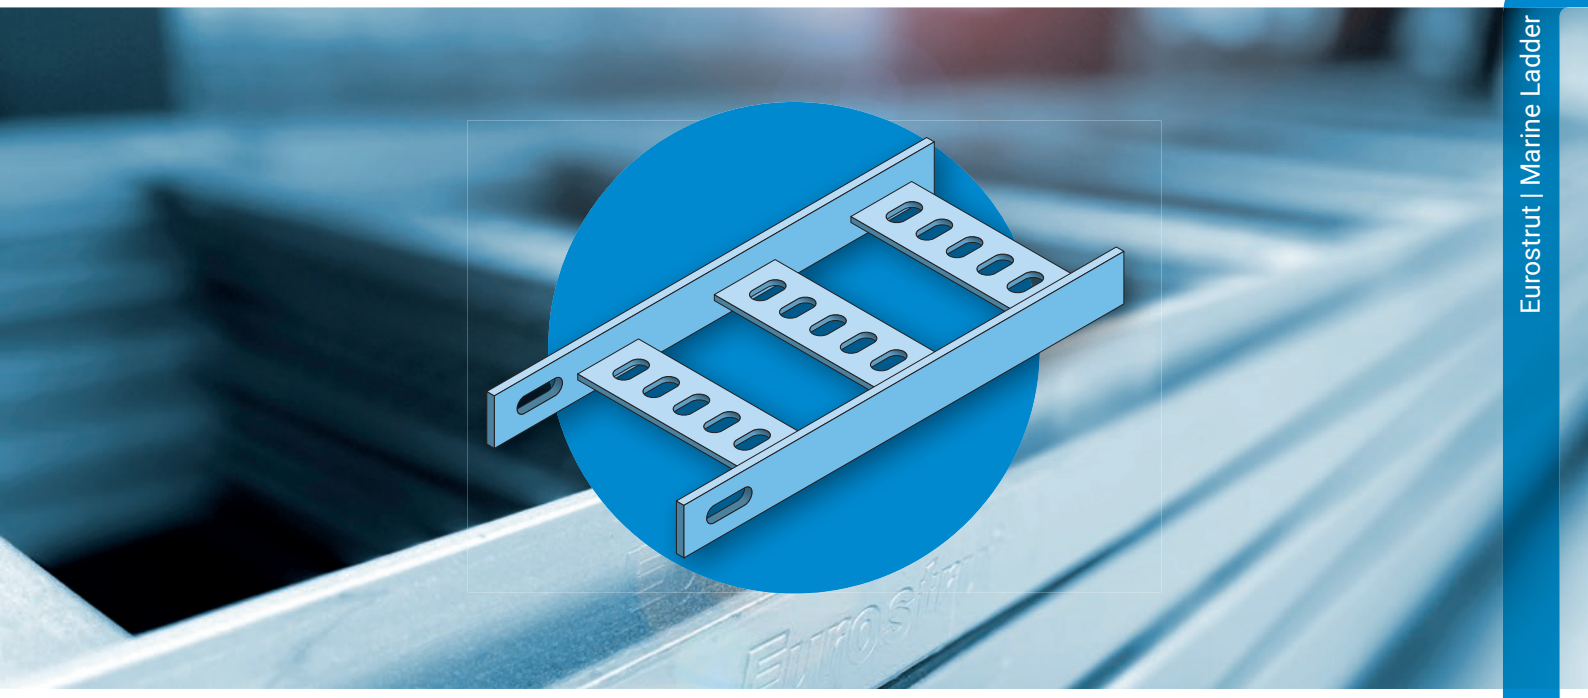

Eurostrut | Marine Ladder

Marine ladder for locations where space is limited, for lower cable volumes and loads

General specifications

- The Eurostrut Marine Ladder is manufactured in accordance with BS EN 61537 / IEC 61537.
- Standard material is carbon steel, standard surface finish is hot dip galvanized (HDG), in accordance with NEN-EN-ISO 1461.
- Thickness layer for ladders (and most accessories) is 60 to 70 µm.
- (On request) materials also available in stainless steel 304 or 316L.
- Powder coating according to RAL colors possible.
- All rungs are welded to the side wall of the marine ladder.
- Accessories must be supported on all sides.
- The standard angle for accessories is 90°.
- Other angles for accessories are available on request.
- The standard radius for accessories is 150 mm.
- Other radii for accessories are available on request.
- Other widths available on request.

General conditions

- Eurostrut Support Systems & Solutions B.V. is not liable for any materials that are incorrectly installed or where different parts or maintenance methods are applied.
- Although the product information shown above is accurate and reliable, Eurostrut Support Systems & Solutions B.V. can not be held responsible and liable for inaccuracies.
- The performance data are specific and may be subject to variations due to normal manufacturing tolerances.
- Eurostrut Support Systems & Solutions B.V. reserves the right to change performance information or specifications at any time without notice.
- Extra loads of snow, wind, etc. are not included, these must be calculated separately.
- It is not allowed to walk on mounted cable management systems.
- It is not allowed to support scaffolding, or other objects, against mounted cable management systems.

2ba

The convenience of 2ba

Eurostrut's products are listed with all associated information in 2BA's central article database. Product, price and stock information must be continuously available in order to operate efficiently. The 2BA data pool offers the solution.

2ba.nl

The main advantages of 2BA:

- Design, calculate and order more efficiently because all product and price information comes from the same source.
- Data is directly available via the leading ERP software packages or your own custom system.
- You have your own net purchase prices based on Eurostrut's agreed purchasing conditions.

GECERTIFICEERD NCI ISO 9001

ISO 9001


Quality management is reflected in all processes within Eurostrut and ensures that we control them well and that our products and services meet the needs, requirements, wishes and specifications of our customers and other stakeholders.

Ensuring continuous improvement of quality is very important for ourselves and our clients.

ESL | Eurostrut | Marine Ladder

SPECIFICATIONS

- Length 3 meter
- Thickness 5 mm
- Carbon steel, standard surface finish is hot dip galvanized (HDG), in accordance with NEN-EN-ISO 1461.
- Thickness layer 65 to 70 µm.
- Also available in stainless steel 304 or 316L.
- Powder coating according to RAL colors possible.

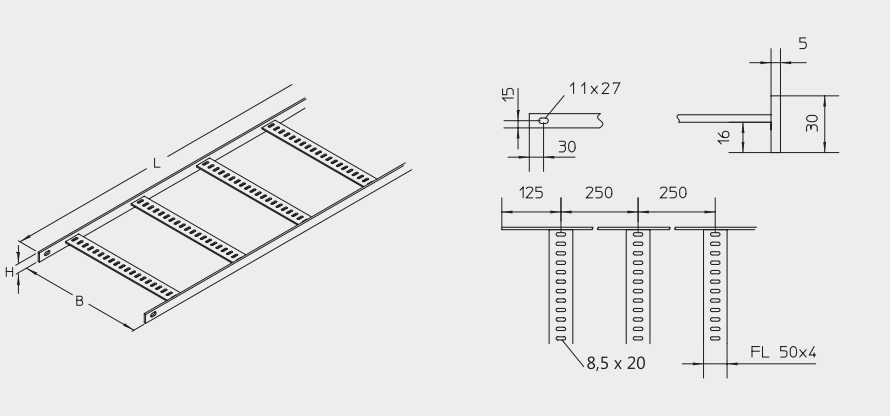


	Article number	B mm	H mm	L mm	kg/ unit
●	ESL-075H	75	30	3000	8,4
●	ESL-100H	100	30	3000	8,7
●	ESL-150H	150	30	3000	9,3
●	ESL-200H	200	30	3000	9,9
●	ESL-250H	250	30	3000	10,6
●	ESL-300H	300	30	3000	11,4
●	ESL-400H	400	30	3000	12,9
●	ESL-500H	500	30	3000	14,4

● In stock ● Limited stock ● On request

Available surface finishes	Change H to	Stock
Hot dip galvanized	-	●
Stainless steel A4 / 316L	S316	●
Stainless steel A2 / 304	S304	●

LOAD DATA

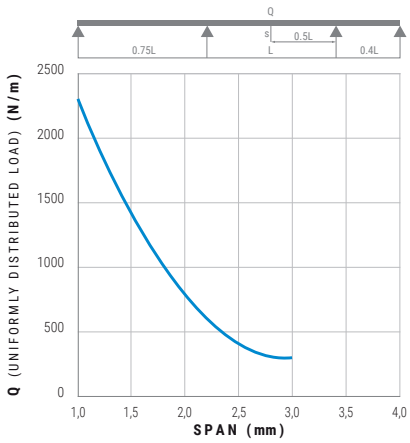




ESL-B | Eurostrut | Horizontal Bend for Marine Ladder

SPECIFICATIONS

- Carbon steel, standard surface finish is hot dip galvanized (HDG), in accordance with NEN-EN-ISO 1461.
- Thickness layer 65 to 70 µm.
- Also available in stainless steel 304 or 316L.
- Standard angle for accessories is 90°.
- Other angles and radii available on request.

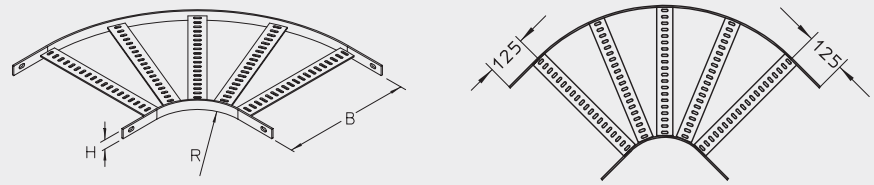

	Article number	B mm	H mm	R mm	kg/ unit
●	ESL-B-075H	75	30	150	1,6
●	ESL-B-100H	100	30	150	1,7
●	ESL-B-150H	150	30	150	2,0
●	ESL-B-200H	200	30	150	2,2
●	ESL-B-250H	250	30	150	3,0
●	ESL-B-300H	300	30	150	3,7
●	ESL-B-400H	400	30	150	4,5
●	ESL-B-500H	500	30	150	6,1

● In stock ● Limited stock ● On request

Available surface finishes	Change H to	Stock
Hot dip galvanized	-	●
Stainless steel A4 / 316L	S316	●
Stainless steel A2 / 304	S304	●



ESL-T | Eurostrut | T-piece for Marine Ladder


SPECIFICATIONS


- Carbon steel, standard surface finish is hot dip galvanized (HDG), in accordance with NEN-EN-ISO 1461.
- Thickness layer 65 to 70 µm.
- Also available in stainless steel 304 or 316L.
- Standard angle for accessories is 90°.
- Other angles and radii available on request.

	Article number	B mm	H mm	R mm	kg/ unit
●	ESL-T-075H	75	30	150	2,5
●	ESL-T-100H	100	30	150	2,7
●	ESL-T-150H	150	30	150	3,2
●	ESL-T-200H	200	30	150	3,6
●	ESL-T-250H	250	30	150	-
●	ESL-T-300H	300	30	150	5,4
●	ESL-T-400H	400	30	150	6,5
●	ESL-T-500H	500	30	150	8,8

● In stock ● Limited stock ● On request

Available surface finishes	Change H to	Stock
Hot dip galvanized	-	●
Stainless steel A4 / 316L	S316	●
Stainless steel A2 / 304	S304	●

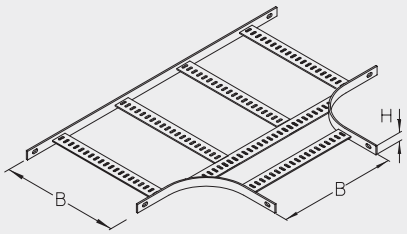



ESL-A | Eurostrut | Stitch On Piece for Marine Ladder


SPECIFICATIONS


- Carbon steel, standard surface finish is hot dip galvanized (HDG), in accordance with NEN-EN-ISO 1461.
- Thickness layer 65 to 70 µm.
- Also available in stainless steel 304 or 316L.
- Standard angle for accessories is 90°.
- Other angles and radii available on request.

	Article number	B mm	H mm	R mm	kg/ unit
●	ESL-A-075H	75	30	150	1,4
●	ESL-A-100H	100	30	150	1,5
●	ESL-A-150H	150	30	150	1,7
●	ESL-A-200H	200	30	150	1,8
●	ESL-A-250H	250	30	150	-
●	ESL-A-300H	300	30	150	2,5
●	ESL-A-400H	400	30	150	2,8
●	ESL-A-500H	500	30	150	3,4

● In stock ● Limited stock ● On request

Available surface finishes	Change H to	Stock
Hot dip galvanized	-	●
Stainless steel A4 / 316L	S316	●
Stainless steel A2 / 304	S304	●

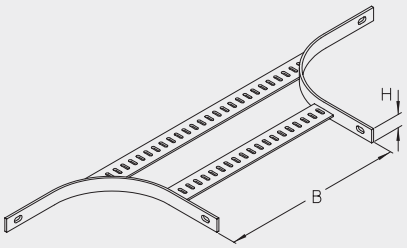




ESL-SV | Eurostrut | Vertical Inside / Outside Bend for Marine Ladder

SPECIFICATIONS


- Carbon steel, standard surface finish is hot dip galvanized (HDG), in accordance with NEN-EN-ISO 1461.
- Thickness layer 65 to 70 µm.
- Also available in stainless steel 304 or 316L.
- Standard angle for accessories is 90°.
- Other angles and radii available on request.

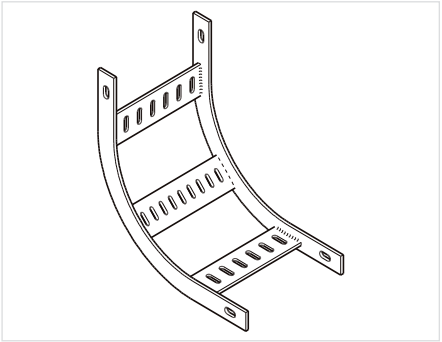

	Article number	B mm	H mm	R mm	kg/ unit
●	ESL-SV-075H	75	30	150	0,9
●	ESL-SV-100H	100	30	150	1,0
●	ESL-SV-150H	150	30	150	1,0
●	ESL-SV-200H	200	30	150	1,3
●	ESL-SV-250H	250	30	150	-
●	ESL-SV-300H	300	30	150	1,7
●	ESL-SV-400H	400	30	150	2,8
●	ESL-SV-500H	500	30	150	3,3

● In stock ● Limited stock ● On request

Available surface finishes	Change H to	Stock
Hot dip galvanized	-	●
Stainless steel A4 / 316L	S316	●
Stainless steel A2 / 304	S304	●

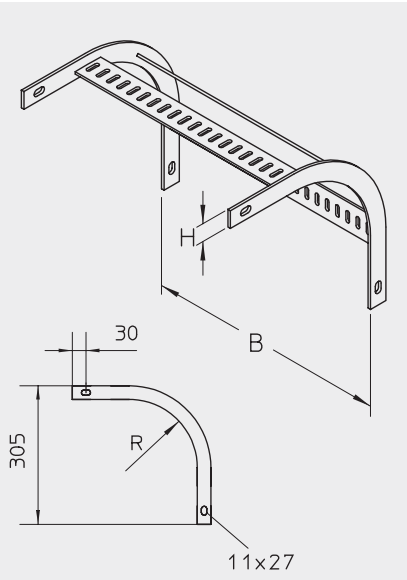


ESL-SC | Eurostrut | Straight Connector for Marine Ladder

SPECIFICATIONS

- Carbon steel, standard surface finish is hot dip galvanized (HDG), in accordance with NEN-EN-ISO 1461.
- Thickness layer 65 to 70 µm.
- Also available in stainless steel 304 or 316L.
- Inclusive 2x Eurostrut Fixing Set ESL-SB (Square Neck Bolt M10x20, Washer and Nut).

	Article number	B mm	H mm	kg/ unit
●	ESL-SC-H	120	38	0,1
●	ESL-SC-S304	120	38	0,1
●	ESL-SC-S316	120	38	0,1

● In stock ● Limited stock ● On request

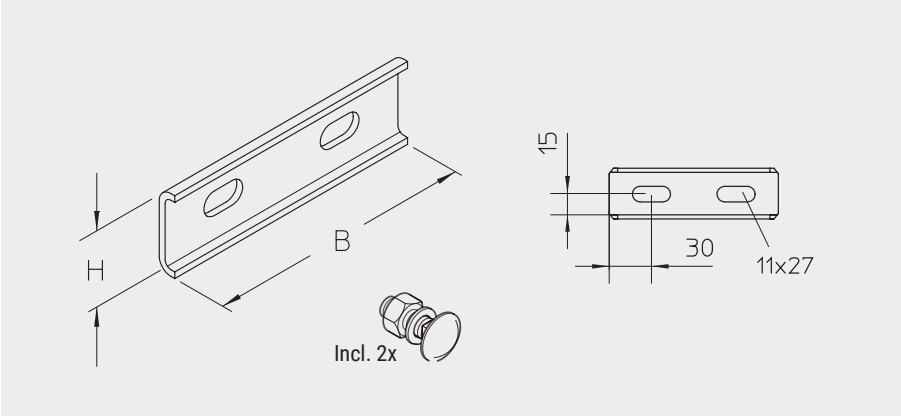


ESL-VC | Eurostrut | Vertical Hinged Connector for Marine Ladder

SPECIFICATIONS

- Carbon steel, standard surface finish is hot dip galvanized (HDG), in accordance with NEN-EN-ISO 1461.
- Thickness layer 65 to 70 µm.
- Also available in stainless steel 304 or 316L.
- Inclusive 2x Eurostrut Fixing Set ESL-SB (Square Neck Bolt M10x20, Washer and Nut).

	Article number	B mm	H mm	kg/ unit
●	ESL-VC-H	120	38	0,1
●	ESL-VC-S304	120	38	0,1
●	ESL-VC-S316	120	38	0,1

● In stock ● Limited stock ● On request

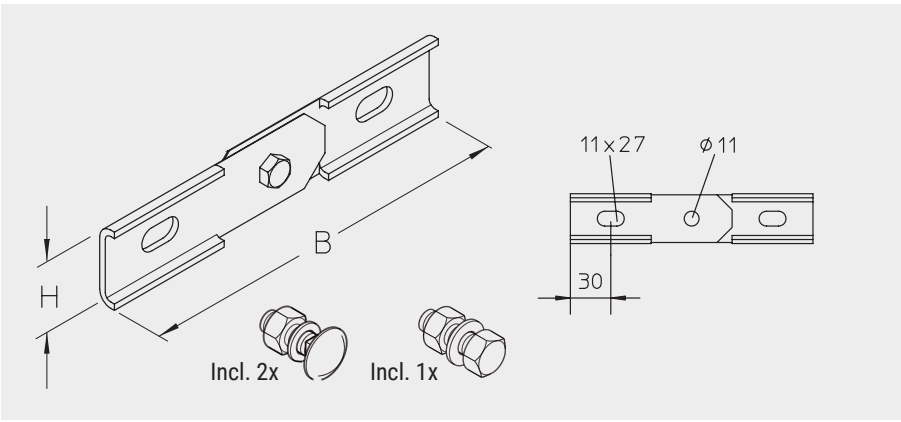


ESL-DIV | Eurostrut | Divider for Marine Ladder

SPECIFICATIONS


- Carbon steel, standard surface finish is hot dip galvanized (HDG), in accordance with NEN-EN-ISO 1461.
- Thickness layer 65 to 70 µm.
- Also available in stainless steel 304 or 316L.
- Inclusive 3x Eurostrut Fixing Set EFS08x15 (Square Neck Bolt M8x15, Washer and Nut).

	Article number	L mm	H mm	B mm	T mm	kg/ unit
●	ESL-DIV-H	3000	15	25	2	0,8
●	ESL-DIV-S304	3000	15	25	2	0,8
●	ESL-DIV-S316	3000	15	25	2	0,8

● In stock ● Limited stock ● On request

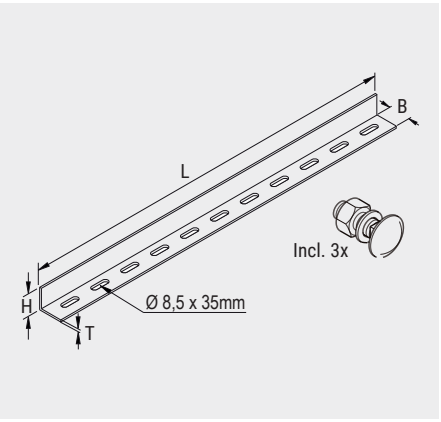

Application

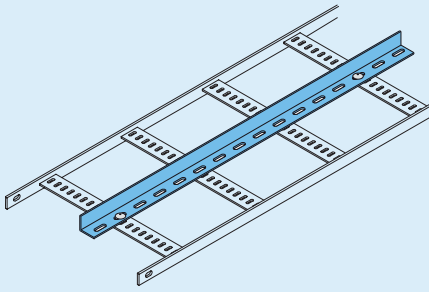


ESL-SB / EFS | Eurostrut | Fixing Set | Square Neck Bolt + Washer + Nut

SPECIFICATIONS

- Surface finish:
  - Hot dip galvanized (H)
  - Stainless steel A4 / 316L (S316)
  - Stainless steel A2 / 304 (S304)
  - Geomet® (GEO)

	Article number	MxL mm	kg/ unit
●	ESL-SB-H	M10x20	0,04
●	ESL-SB-S304	M10x20	0,04
●	ESL-SB-S316	M10x20	0,04
●	EFS06x15-304	M6x15	0,01
●	EFS06x15-316	M6x15	0,01
●	EFS06x15-GEO	M6x15	0,01
●	EFS08x15-304	M8x15	0,014
●	EFS08x15-316	M8x15	0,014
●	EFS08x15-GEO	M8x15	0,014

● In stock ● Limited stock ● On request




ESL-HC | Eurostrut | Hold Down Clamp for Marine Ladder


SPECIFICATIONS

- Carbon steel, standard surface finish is hot dip galvanized (HDG), in accordance with NEN-EN-ISO 1461.
- Thickness layer 65 to 70 µm.
- Also available in stainless steel 304 or 316L.

	Article number	kg/ unit
●	ESL-HC-H	0,04
●	ESL-HC-S304	0,12
●	ESL-HC-S316	0,12

● In stock ● Limited stock ● On request






ESL-HB | Eurostrut | Hook Bolt M8 for Marine Ladder


SPECIFICATIONS

- Including washer and hex nut bolt
- Carbon steel, standard surface finish is hot dip galvanized (HDG), in accordance with NEN-EN-ISO 1461.
- Thickness layer 65 to 70 µm.
- Also available in stainless steel 304 or 316L.

	Article number	kg/ unit
●	ESL-HB-H	0,04
●	ESL-HB-S304	0,04
●	ESL-HB-S316	0,04

● In stock ● Limited stock ● On request






ESL-PECB | Eurostrut | Protection End Cap Black for Marine Ladder

SPECIFICATIONS


- Material: PVC


	Article number	B mm	H mm	L mm	kg/ unit
●	ESL-PECB	5	30	25	0,005

● In stock ● Limited stock ● On request

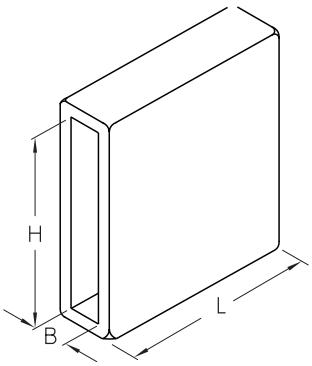

Application

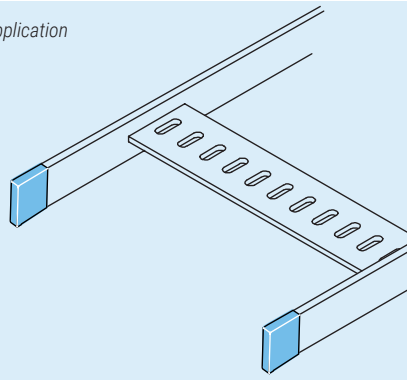

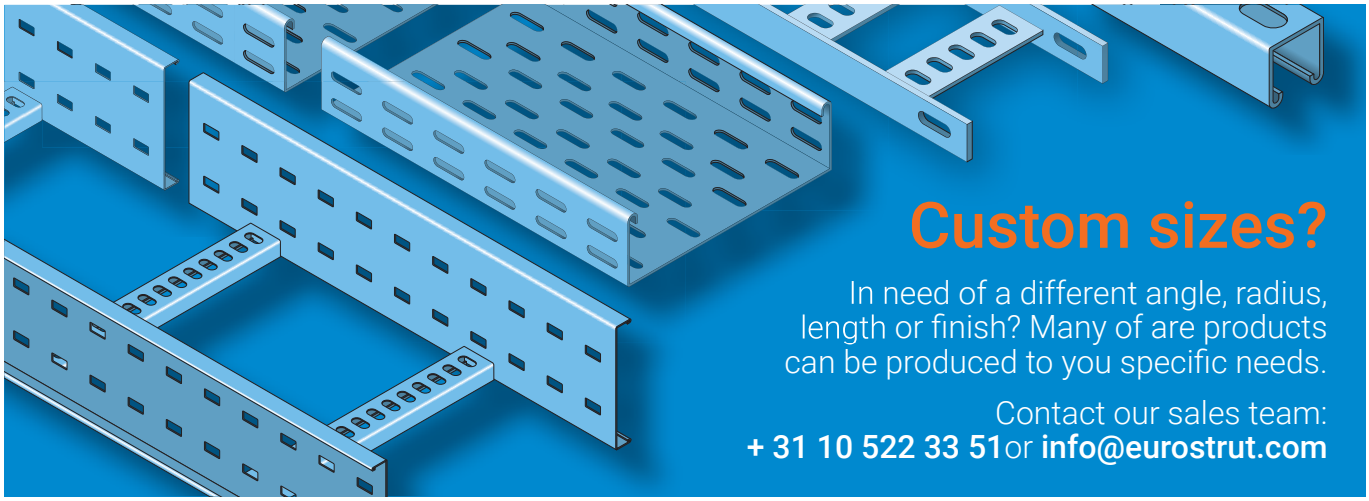

Custom sizes?

In need of a different angle, radius, length or finish? Many of are products can be produced to you specific needs.

Contact our sales team:
+ 31 10 522 33 51 or **info@eurostrut.com**



Eurostrut®

Cable Management Systems & Solutions

Van Heekstraat 18 | 3125 BN Schiedam | The Netherlands
+31 10 522 33 51 | info@eurostrut.com