

# Product Datasheet

## SRB-45-30

### Bend 45° Closed 30mm

The SRB-45-30 is a robust, fully enclosed 45° bend, specifically designed for protecting and routing cables in electrical installations. With an outer diameter of 30 mm and an inner diameter of 27 mm, this bend provides a seamless and secure connection between cable protection conduits in angled configurations. Its enclosed design ensures all-around protection of cables against mechanical stress, dirt, and moisture.

The SRB-45-30 is compatible with Eurostrut cable protection conduits SR-30 and SRL-30. Proper installation requires the use of the matching SKM-30 coupling sleeve.

#### Technical specifications

<b>Deflection (angle):</b>	45°
<b>Outer diameter:</b>	30 mm
<b>Inner diameter:</b>	27 mm
<b>Wall thickness:</b>	1.5 mm
<b>Type:</b>	Closed bend for cable protection conduit SR-30 and SRL-30
<b>Mounting:</b>	With SKM-30-FT coupling sleeve
<b>General tolerance:</b>	0.5
<b>Angle tolerance:</b>	0.5°
<b>Weight:</b>	0.28 kg/unit

#### Available variants

##### Hot-dip galvanized steel (FT)

For standard industrial applications

<b>Material:</b>	Cold-rolled structural steel S235JRG
<b>Finish:</b>	Hot-dip galvanized according to NEN-EN-ISO 1461 (min. 45 µm)

##### Stainless steel 304 (ER2)

For enhanced corrosion resistance



<b>Material:</b>	Stainless steel 304 (ER2)
<b>Finish:</b>	None

##### Stainless steel 316L (ER4)

For highly corrosive environments

<b>Material:</b>	Stainless steel 316L (1.4404)
<b>Finish:</b>	None

Article number	△	D mm	E mm	kg/unit
SRB-45-30-FT	45°	30	1.5	0.28
SRB-45-30-ER2	45°	30	1.5	0.28
SRB-45-30-ER4	45°	30	1.5	0.28

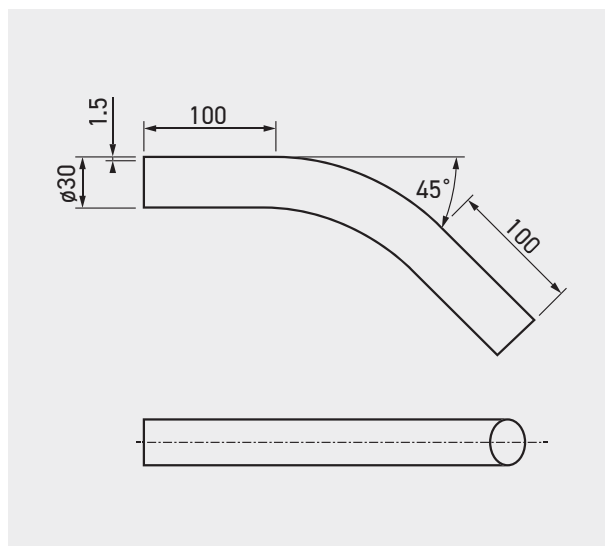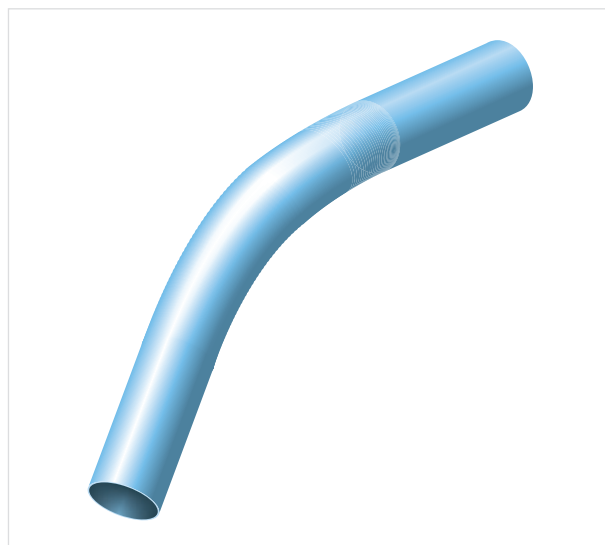

Toepassing

