

Product Datasheet

SRBO-90-30

Bend 90° Open

The SRBO-90-30-FT is an open 90° bend for cable protection conduits with an outer diameter of 30 mm. The precisely laser-cut opening makes this bend ideal for installations where cables need to be inserted or branched off at a sharp angle.

Compatible with cable protection conduits SR-30-FT and SRL-30-FT. Installation is done using the SKM-30-FT coupling sleeve.

Technical specifications

Deflection (angle): 90°

Outer diameter: 30 mm

Inner diameter: 27 mm

Wall thickness: 1.5 mm

Type: Open bend with laser-cut opening for cable protection conduit SR-30 and SRL-30

Mounting: With SKM-30-FT coupling sleeve

General tolerance: 0.5

Angle tolerance: 0.5°

Weight: 0.44 – 0.45 kg/unit

Available variants

Hot-dip galvanized steel (SR-30-FT)

For standard industrial applications

Material: Cold-rolled structural steel S235JRG

Finish: Hot-dip galvanized according to NEN-EN-ISO 1461 (min. 45 µm)

Stainless steel 304 (SR-30-ER2)

For enhanced corrosion resistance

Material: Stainless steel 304 (ER2)


Finish: Pickled and passivated

Stainless steel 316L (SR-30-ER4)


For highly corrosive environments

Material: Stainless steel 316L (1.4404)

Finish: Pickled and passivated

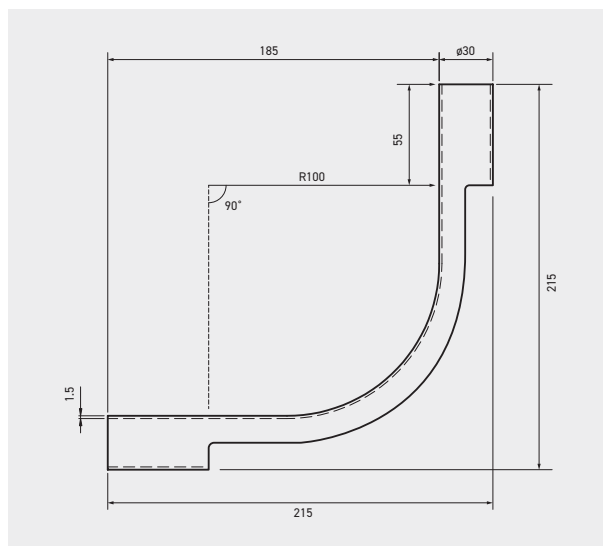

Toeassing

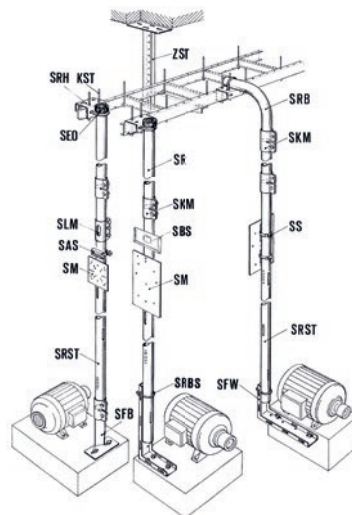

Article number	R mm	D mm	E mm	kg/unit
SRBO-90-30-FT	100	30	1.5	0.44
SRBO-90-30-ER2	100	30	1.5	0.45
SRBO-90-30-ER4	100	30	1.5	0.45