

Product Datasheet

SHKWS-30

Mounting Bracket Rotatable 30mm

The SHKWS-30 is a solid pipe clamp for suspending or mounting cable protection tubes with a diameter of 30 mm. It is designed for secure installation on ceilings or structural supports.

Technical specifications

| | |
|---------------------------|--|
| Application: | Mounting cable protection tubes to a flat surface or structural supports |
| For tube diameter: | 30 mm |
| Compatible with: | SR-30 and SRL-30 cable protection tubes |
| Wall thickness: | 3 mm |
| Includes: | SRBS U-bolt set and 2x fastening sets (nut, bolt, and washer) |
| Mounting: | Fixing to ceiling or structural support via screw holes |
| Weight: | 0.49–0.50 kg/unit |

Available variants

Hot-dip galvanized steel (FT)

For standard industrial applications

| | |
|------------------|--|
| Material: | Cold-rolled structural steel S235JRG |
| Finish: | Hot-dip galvanized according to NEN-EN-ISO 1461 (min. 45 µm) |
| Layer: | 60 - 80 µm |

Stainless steel 304 (ER2)



For enhanced corrosion resistance

| | |
|------------------|---------------------------|
| Material: | Stainless steel 304 (ER2) |
| Finish: | Pickled and passivated |


Stainless steel 316L (ER4)

For highly corrosive environments

| | |
|------------------|-------------------------------|
| Material: | Stainless steel 316L (1.4404) |
| Finish: | Pickled and passivated |

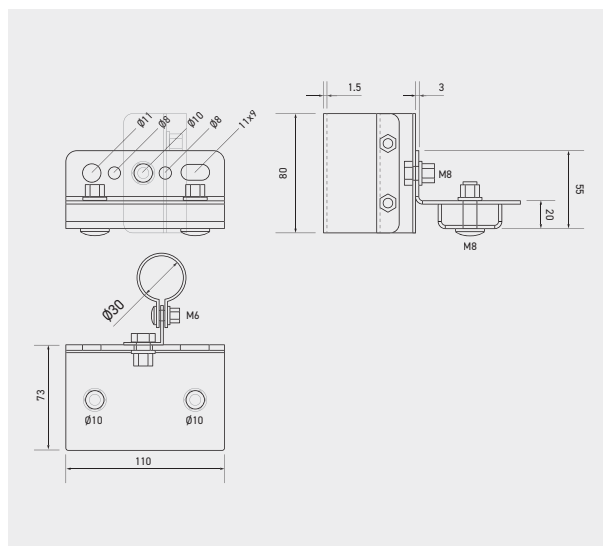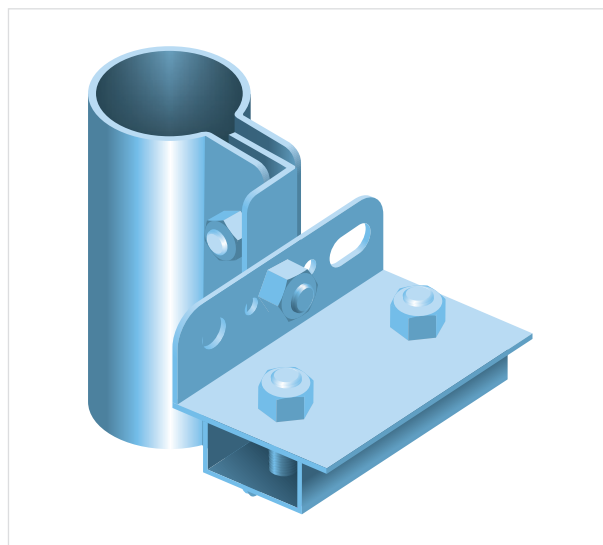

Toeassing

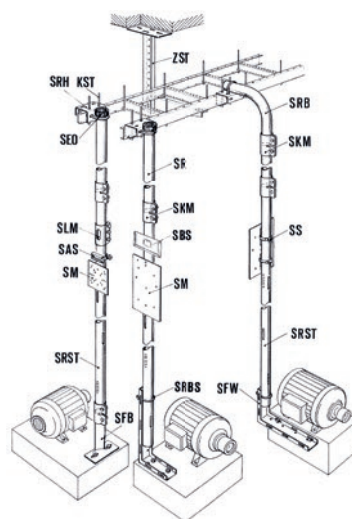

| Article number | kg/unit |
|----------------|---------|
| SHKWS-30-FT | 0.68 |
| SHKWS-30-ER2 | 0.67 |
| SHKWS-30-ER4 | 0.67 |