

# Product Datasheet

## SRBO-90-30

### Bend 90° Open 30mm

The SRBO-90-30 is an open 90° bend for cable protection conduits with an outer diameter of 30 mm. The precisely laser-cut opening makes this bend ideal for installations where cables need to be inserted or branched off at a sharp angle.

Compatible with cable protection conduits SR-30 and SRL-30. Installation is done using the SKM-30 coupling sleeve.

#### Technical specifications

**Deflection (angle):** 90°

**Outer diameter:** 30 mm

**Inner diameter:** 27 mm

**Wall thickness:** 1.5 mm

**Type:** Open bend with laser-cut opening for cable protection conduit SR-30 and SRL-30

**Mounting:** With SKM-30 coupling sleeve

**General tolerance:** 0.5

**Angle tolerance:** 0.5°

**Weight:** 0.44 – 0.45 kg/unit

#### Available variants

##### Hot-dip galvanized steel (FT)

*For standard industrial applications*

**Material:** Cold-rolled structural steel S235JRG

**Finish:** Hot-dip galvanized according to NEN-EN-ISO 1461 (min. 45 µm)

##### Stainless steel 304 (ER2)

*For enhanced corrosion resistance*

**Material:** Stainless steel 304 (ER2)


**Finish:** Pickled and passivated

##### Stainless steel 316L (ER4)


*For highly corrosive environments*

**Material:** Stainless steel 316L (1.4404)

**Finish:** Pickled and passivated

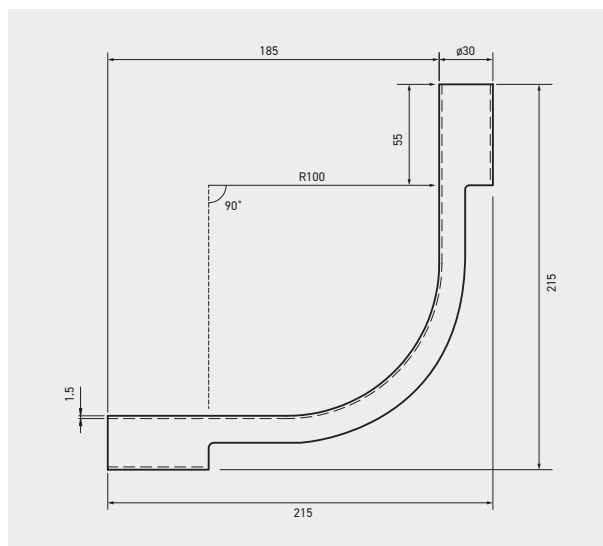

Toepassing

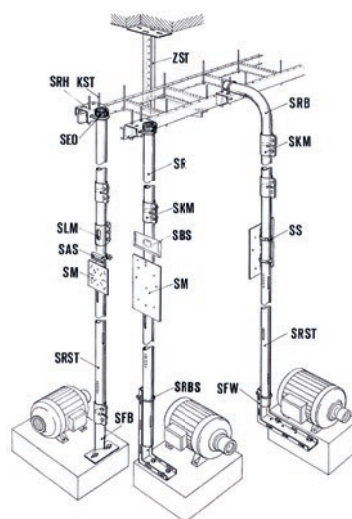

| Article number | R mm | D mm | E mm | kg/unit |
|----------------|------|------|------|---------|
| SRBO-90-30-FT  | 100  | 30   | 1.5  | 0.44    |
| SRBO-90-30-ER2 | 100  | 30   | 1.5  | 0.45    |
| SRBO-90-30-ER4 | 100  | 30   | 1.5  | 0.45    |