

Product Datasheet

SFB-30

Floor Mounting Cable Protection Tube 30mm

The SFB-30 is a base plate suitable for cable protection conduits with a diameter of 30 mm. This base plate provides a stable and secure mounting solution for attaching the conduit to floors, walls, ceilings, or other structural elements.

Technical specifications

Application:	Fixing cable protection conduits to floor, wall, or ceiling
For conduit diameter:	30 mm
Compatible with:	SR-30 and SRL-30 cable protection conduits
Height:	134 mm
Inner diameter:	30.8 mm
Base plate:	130 x 40 mm
Base plate thickness:	4 mm
Wall thickness:	1.5 mm
General tolerance:	0.5 mm
Angle tolerance:	1°
Includes:	1x M6 fastening set
Mounting:	Insert conduit into the sleeve and tighten the fastening set. Mount to flat surface via screw holes
Weight:	0.30 – 0.32 kg/unit

Available variants

Hot-dip galvanized steel (SR-30-FT)

For standard industrial applications

Material:	Cold-rolled structural steel S235JRG
Finish:	Hot-dip galvanized according to NEN-EN-ISO 1461 (min. 45 µm)
Layer:	60 - 80 µm

Stainless steel 304 (SR-30-ER2)

For enhanced corrosion resistance




Material:	Stainless steel 304 (ER2)
Finish:	Pickled and passivated

Stainless steel 316L (SR-30-ER4)

For highly corrosive environments

Material:	Stainless steel 316L (1.4404)
Finish:	Pickled and passivated

Article number	D mm	E mm	kg/unit
SFB-30-FT	30	1.5	0.30
SFB-30-ER2	30	1.5	0.32
SFB-30-ER4	30	1.5	0.32

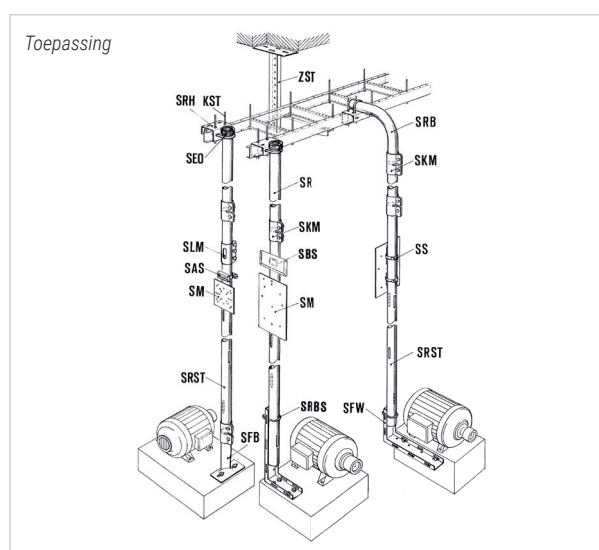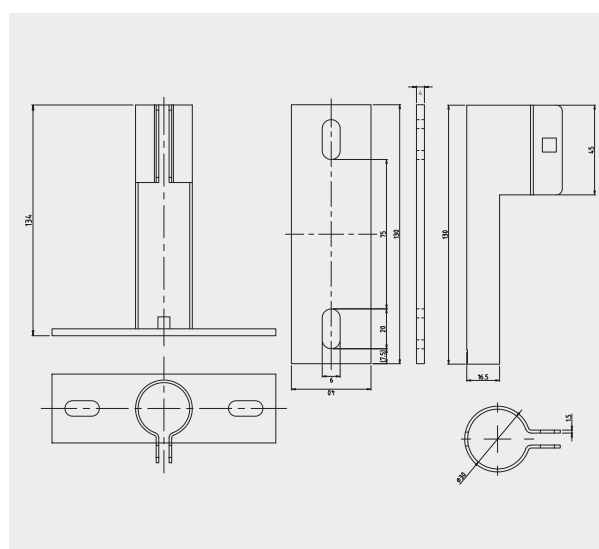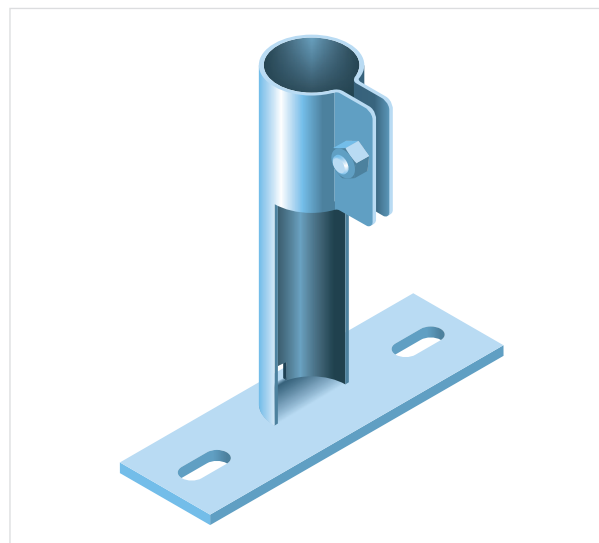

Eurostrut® Cable Management Systems & Solutions

+ 31 10 522 33 51 | info@eurostrut.com | eurostrut.com

